


PRO-SEAL WINDOW JAMB-LINERS are uniquely designed to modernize double-hung windows for beauty and efficiency. Using state of the art methods in extrusion technology, the "Living-Hinge" weatherstrip on the parting bead enables the sash to glide easily while eliminating air infiltration.

PRO-SEAL JAMB-LINERS' superior weatherability makes this a practical and cost effective energy conservation measure in any climate.

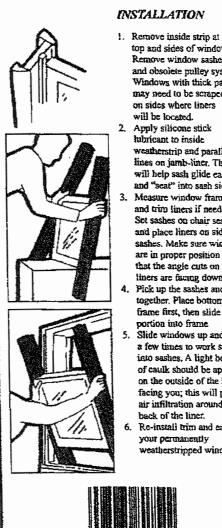

INSTALLATION

- top and sides of window Remove window sashes and obsolete pulley system. Windows with thick paint may need to be scraped on sides where liners will be located.
- hubricant to inside weatherstrip and parallel lines on jamb-liner. This will help sash glide easier and "seat" into sash sides.
- Measure window frame size and trive liners if needed. Set sashes on chair seat and place liners on sides of sashes. Make sure windows are in proper position and that the angle cuts on the liners are facing down.
- 4. Pick up the sashes and liners together. Place bottom on frame first, then slide top portion into frame
- Slide windows up and down a few times to work silicone iato sashes. A light bead of caulk should be applied on the outside of the liner, facing you; this will prevent air infiltration around the back of the liner. 6. Re-instali trim and enjoy
 - your permanently weatherstripped windows

