


Technical Product Specification

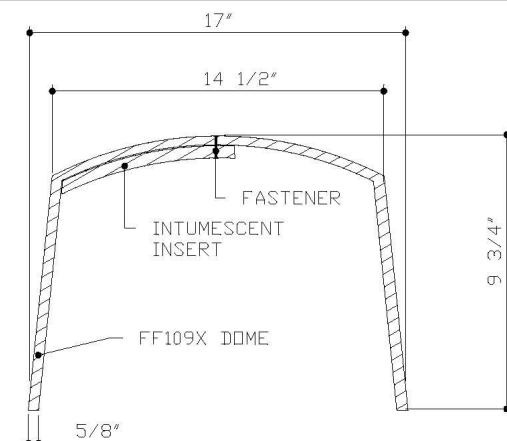

Model Number	Inside Height	Outside Diameter
FF109X	8"	17"

Performance Data

For Use:

- UL Classified to maintain fire ratings of up to two hours for the following fire-rated floor/ceiling assemblies: L500, D500, G500, D200, G200, J200 and L200 series
- UL Classified to maintain fire ratings of up to one hour for the following roof/ceiling assemblies (attics): P200 and P500 series



CLASSIFIED FOR FIRE RESISTANCE
 FIRE RESISTANCE CLASSIFICATION
 SEE UL FIRE RESISTANCE DIRECTORY

General Information

Benefits:

- 120 minute protection.
- Fits most popular IC rated fixtures.
- For use with recessed incandescent, fluorescent or LED light fixtures.
- For Joist Spacing up to 24" on center.
- Suitable for 2"x10", 2"x12", 2"x14" and 2"x16" joists.
- Can be used in floor/ceiling, as well as roof/ceiling assemblies (attic).
- Flexible and lightweight (approx. 2.5 lbs).
- Easy Installation - can be fitted in seconds - no screws, drilling or additional sealant required.
- Maintenance free.



The FF109X is the only two hour UL classified fire barrier that can be used with a wide range of recessed lights to effectively prevent the spread of flames through a ceiling opening.

The flexible and lightweight enclosures are made out of an intumescent material which will be activated in case of a fire, stopping both, flame spread and heat transmission for up to 2 hours.

